


# H03VH-H

IT IS USED AS A CONNECTING CABLE IN DEVICE CONNECTIONS  
IN DRY PLACES WHERE THERE IS NO MECHANICAL STRAIN.

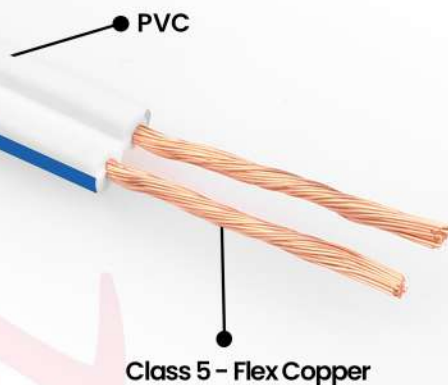

**TYPE:** H03VH-H

## TECHNICAL DATA:

**Max. Operating Temperature:** +70°C

**Rated Voltage:** 300 / 300 V

**Declared Performance:**

**Eca** (EN 50575:2014/A1:2016 )

Flame Retardant According to IEC/EN 60332-1-2

## CONSTRUCTION:

### CONDUCTOR

EN 60228 Class 5 - Flex Copper

### INSULATION

PVC



# H03VH-H

SIZE (mm <sup>2</sup> )	MEAN OVERALL DIAMETER (mm)	CURRENT CARRYING CAPACITY (A)	CONDUCTOR RESISTANCE (Ohm/km)	APPROXIMATE WEIGHT (kg/km)
2 x 0.50	2.2 x 4.4	3	39	17
2 x 0.75	2.5 x 5.5	6	26	29
2 x 1	2.7 x 5.8	10	19.5	35
2 x 1.5	3.3 x 6.2	16	13.3	45
2 x 2.5	3.5 x 7.7	25	7.98	62

## APPLICATION

It is in flat form and suitable for use in moving devices used in dry and non-humid places where mechanical strain is low.



## REGULATORY COMPLIANCE

This cable is compliant with European Regulation EN 50575, the Construction Products Regulation.



## CORE IDENTIFICATION

**2 Cores:** White or Black - Color Line

**Color Of Sheath:** White or Black

+90 258 371 0030

export@cmkkablo.com  
www.cmkkablo.com

Hacıyüplü, Akça Cd. No: 157,  
20050 Merkezefendi / Denizli **Türkiye**